Octagon Stem Casters

SANITARY CASTERS

Light, Medium, & Heavy Duty

Many applications require the use of a versatile octagon stem and either bolted or welded attachment to angle iron legs. Available in light, medium, and heavy duty, these models are equipped with hardened double ball bearing swivel raceways with removable nut and bolt axles, and a standard zinc plated finish. Additional stem sizes and wheels may be available upon request.



26-3OX

- Light duty
- Rigids cannot be supplied
- WK Brakes are available

Optional Extras:

TG Thread Guards
cannot be used with WK brakes

WK Brake
locks wheel, not used with Thread Guards

WS Wheel Seals
locks out foreign matter

LIGHT DUTY: 026 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER	Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain & Oilite Self Lubrication Bearings	lbs	inches	inches	Standard in	Variations Available in
2	7/8	Payron	100	026-2PS	1/2	2	2 3/4	3/4 x 2 1/16 (See line Drawing)	Consult Factory
		Payflex	75	026-20X					
		Payrock	100	026-20H					
2 1/2	7/8	Payflex	75	026-2 1/2OX	3/4	2 1/2	3 7/16		
		Payrock	110	026-2 1/2PJ					
3	31/32	Payflex	100	026-30X	1	2 3/4	3 11/16		
		Payrock	125	026-30H					
4	31/32	Payflex	110	026-40X	1 1/4	3 3/8	4 5/8		
		Payrock	135	026-40H					
5	31/32	Payflex	125	026-50X	1 1/2	4 1/8	5 5/8		
		Payrock	145	026-50H					

No Rigid Models available. Standard Stem sizes will be furnished unless otherwise specified. Additional wheels and other options are available. See 020 Series; pages 12-13.



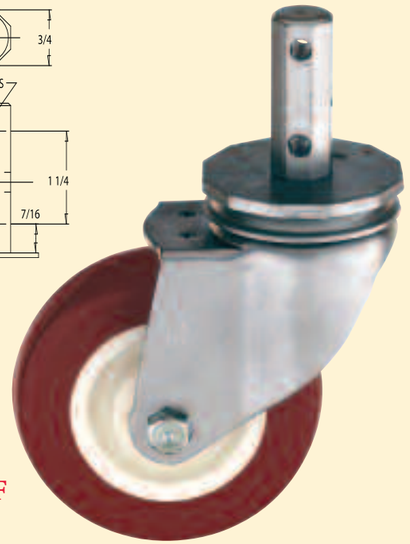

056-4DF

- Medium duty
- Companion rigids
- WK Brakes available with swivels only



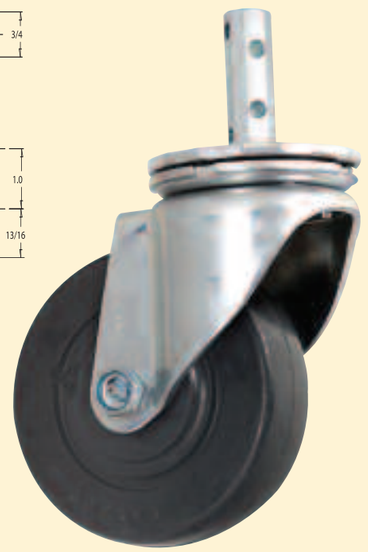

076-5OH

- Heavy duty
- Companion rigids
- WK Brakes available with swivels only
- Lubrication fittings for swivel and anti-friction bearing wheels

MEDIUM DUTY: 056 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain, Oilite Delrin Bearings	Roller, Ball Bearings	lbs	inches	inches	Standard in	Variations Available in
3	1 1/4	Payron	210	056-3PS	056-3PS	2 1/2	2 7/8	3 7/8	3/4 x 2 1/16 (See line Drawing)	Consult Factory
	1 3/8	Payflex	125	056-30X		1 1/4				
		Payrock	210	056-30H						
4	1 1/4	Payflex	165	056-40X		2 1/2	3 9/16	4 7/8		
		Payrock	255	056-40H						
	1 1/8	Mirakush	200	056-4DR	056-4BR	2 1/8				
		Miratek	240	056-4DF	056-4BF					
5	1 1/4	Payflex	190	056-50X		3	4 5/16	5 15/16		
		Payrock	2690	056-50H						
	1 1/8	Mirakush	200	056-5DR	056-5BR	2 1/2				
		Miratek	240	056-5DF	056-5BF					

Rigid Models are available. To order, use Swivel Catalog Number and add Suffix "R".
Standard Stem sizes will be furnished unless otherwise specified. Additional Wheels and other options are available. See 050 Series; pages 16-17.

HEAVY DUTY: 076 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain, Oilite Delrin Bearings	Roller Bearings	lbs	inches	inches	Standard in	Variations Available in
4	1 3/8	Payron	600	076-4PS	076-4US	5	3 3/4	5 3/8	3/4 x 2 1/2 (See line Drawing)	Consult Factory
	1 1/2	Payflex	200	076-40X		3 3/4				
		Payrock	300	076-40H						
		Mirakush	300	076-4DK	076-74UK					
5	1 1/2	Payron	600	076-50S	076-5US	6	4 5/16	6 3/8		
		Payflex	240	076-50X		4 3/4				
		Payrock	350	076-50H						
		Mirakush	350	076-5DK	076-5UK					

Rigid Models are available. Standard Stem sizes will be furnished unless otherwise specified. Additional Wheels and other options are available. See 070 Series; pages 22-23.