Pipe Stem Casters

Light, Medium, & Heavy Duty

Complementing our stem selection is a wide array of pipe stem models in the light, medium, and heavy duty categories. All models have double ball bearing swivels, heat treated raceways, and removable nut and bolt axles. Standard finish is zinc plated. Additional stems and wheels are available upon request.

055-4OX

- Medium duty
- Companion rigids
- WK Brakes available with swivels only

025-2PS

- Light duty
- Rigids cannot be supplied
- WK Brakes are available

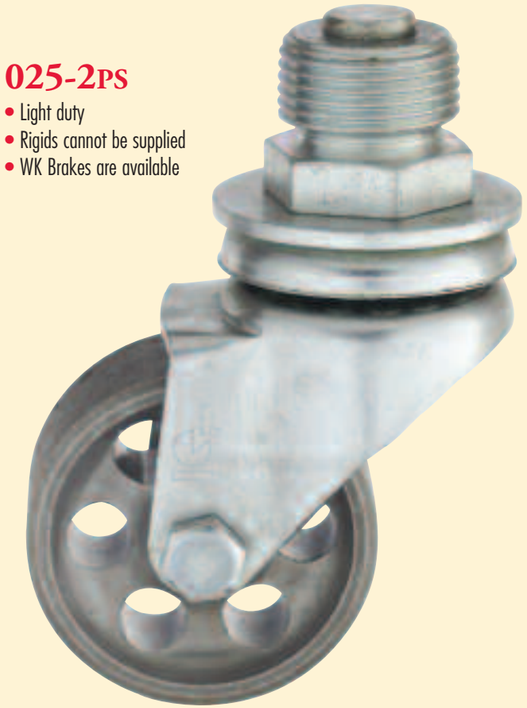

075-4US

- Heavy duty
- Companion rigids
- Contains grease fittings for swivel and anti-friction bearing wheel
- WK Brakes available with swivels only

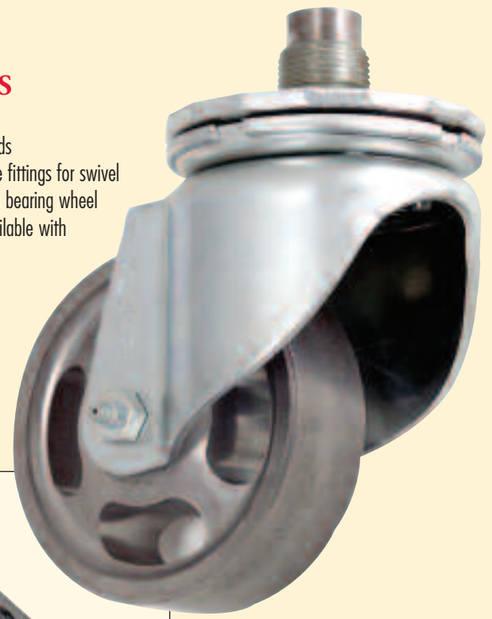

Optional Extras:

TG Thread Guards
cannot be used with WK brakes

WK Brake
locks wheel, not used with Thread Guards

WS Wheel Seals
locks out foreign matter

LIGHT DUTY: 025 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER	Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain & Oilite Self Lubrication Bearings	lbs	inches	inches	Standard in	Variations Available in
2	⅞	Payron	100	025-2PS	½	2	2¾	¾ Tapered Thread NPT	1 Tapered Thread NPT
		Payflex	75	025-20X					
		Payrock	100	025-20H					
2½	⅞	Payflex	75	025-2½OX	¾	2½	3 7/16		
		Peejay	100	025-2½PJ					
3	3 1/32	Payflex	100	025-30X	1	2¾	3 11/16		
		Peejay	125	025-30H					
4	3 1/32	Payflex	110	025-40X	1¼	3⅜	4⅝		
		Payrock	135	025-40H					
5	3 1/32	Payflex	125	025-50X	1½	4⅛	5⅝		
		Payrock	145	025-50H					

No Rigid Models available. Standard Stem sizes will be furnished unless otherwise specified. Additional wheels and other options are available. See 020 Series; pages 12-13.

MEDIUM DUTY: 055 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain, Oilite Delrin Bearings	Roller, Ball Bearings	lbs	inches	inches	Standard in	Variations Available in
3	1¼	Payron	210	055-3PS	055-3US	2½	2⅞	4	¾ Tapered Thread NPT	1 Tapered Thread NPT
	1⅜	Payflex	125	055-30X		1¼				
		Payrock	210	055-30H						
4	1¼	Payflex	165	055-40X		2½	3 3/16	5		
		Payrock	265	055-40H						
	1⅛	Mirakush	200	055-4DR	055-4BR	2⅛				
		Miratek	240	055-4DF	055-4BF					
5	1¼	Payflex	190	055-50X		3	4 5/16	6 1/16		
		Payrock	260	055-50H						
	1⅛	Mirakush	200	055-5DR	055-5BR	2½				
		Miratek	240	055-5DF	055-5BF					

Rigid Models are available. To order, use Swivel Catalog Number and add Suffix "R", as "055-5BR-R".
Standard Stem sizes will be furnished unless otherwise specified. Additional Wheels and other options are available. See 050 Series; pages 16-17.

HEAVY DUTY: 075 SERIES SWIVEL

WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS	
Diameter inches	Width inches	Type	Cap Each lbs	Plain, Oilite Delrin Bearings	Roller Bearings	lbs	inches	inches	Standard in	Variations Available in
4	1⅜	Payron	425	075-4PS	075-4US	5	3¾	5⅜	¾ Tapered Thread NPT	1 Tapered Thread NPT
	1½	Payflex	200	075-40X		3¾				
		Payrock	300	075-40H						
		Mirakush	300	075-4DK	075-4UK					
5	1½	Payron	500	075-50S	075-5US	6	4 5/16	6⅜		
		Payflex	240	075-50X		4¾				
		Payrock	350	075-50H						
		Mirakush	350	075-5DK	075-5UK					

Rigid Models are available. To order, use Swivel Catalog Number and add Suffix "R", as "075-5US-R".
Standard Stem sizes will be furnished unless otherwise specified. Additional Wheels and other options are available. See 070 Series; pages 22-23.